



**Product overview**

Lattice™ is a range of hanging sculptures built from a grid of acoustic fins. Covering a greater surface area than traditional parallel fin systems, Lattice effectively absorbs echo and reverberation in interior spaces. Lattice is made from 100% polyester fibre and is lightweight and structurally sound—holding form over its lifetime.

**Sustainable material**

- Carbon neutral product
- Zero carbon manufacturing
- Recycled content  
- >60% recycled material
- Low VOC and CDPH compliant  
- <0.092mg/m<sup>3</sup> (7 days)
- Zero waste manufacturing initiative
- Sustainable supply chain and anti-modern slavery

**Environmental certifications**

- EPD – compliant with ISO 14025 and ISO 15804
- Declare – Red List free (third party verified)
- ISO 14001 Certified Environmental Management
- Health Product Declaration
- CDPH Standard



**Certifying your green building**

Autex Acoustics products meet criteria for WELL, LEED, Green Star, and BREEAM building rating systems, helping you achieve certification for your project. For support and guidance on available rating system points please visit [www.autexglobal.com](http://www.autexglobal.com), or speak with your Autex Acoustics account manager.

**Specification**

Suspended acoustic absorption system shall be Lattice made from thermally bonded polyester containing not less than 60% recycled material as manufactured by Autex. [www.autexglobal.com](http://www.autexglobal.com)

Suspended acoustic absorber Lattice Eclipse/Torus/Trapezium, colour ( ), sound absorption Class A, NRC 1.00 – if direct fixed to ceiling: Class A, NRC 1.00. Fire rating ASTM E-84-14: Class A, FS:0 - SD:45, ISO 9705: Classification: Group 1-S, AS ISO 9705 – 2003, Classification: Group 1, BS EN 13501-1:2018: B - s2, d0.

Lattice to be supplied unassembled with 4 x 1 m galvanised cables, 4 x ceiling mounts, 4 x “Velda” cable clips, 4 x alloy tube inserts. Install as per Lattice (Eclipse, Torus, Trapezium) Install Instructions.

Suspended acoustic absorber 1450 x 1450 x 293 mm (nom. depth), colour ( ). Fire rating ASTM E-84-15a: Class A, FS:0 - SD:45, ISO 9705: Classification: Group 1-S, AS ISO 9705 – 2003. Classification: Group , BS EN 13501-1:2018: B - s2, d0.

Lattice to be supplied unassembled with 8 x 1 m galvanised cables, 8 x ceiling mounts, 8 x “Velda” cable clips. Install as per Lattice Install Instructions.



## Product specifications

Product name	Lattice™ Eclipse
Composition	100% polyester fibre (PET)
Assembled size	1197 mm x 2346 mm x 337 mm
Tolerance	(+/- 0.5 mm) (+/- 0.5 mm) (+/- 0.5 mm)
Thickness	12 mm
Tolerance	(+/- 6%)

## Installation

Install as per Autex Acoustics recommendations. Install instructions are included in each pack or available on the website.

## Acoustic performance

Lattice Eclipse is specifically designed to reduce and control reverberated noise and echo in building interiors.

Frequency (Hz)	125	250	500	1000	2000	4000	Metric sabin per unit
● Lattice Eclipse (12 mm Direct Fix)	0.60	1.60	1.70	2.20	2.80	3.20	2.10
● Lattice Eclipse (12 mm Suspended 200 mm)	0.30	1.0	1.80	2.30	3.10	3.60	2.05


All results are reported in metric sabin - per unit. Equivalent sound absorption area according to ISO 354 measurement of sound absorption in a reverberation room. Average absorption (sabins per unit) calculated at one-third octave bands centred on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

## Sound Absorption Coefficients according to ISO 354.

University of Auckland Testing Service

Lattice Eclipse 12 mm direct fix - test no: T1420-1

Lattice Eclipse 12 mm suspended 200 mm - test no: T1409-7

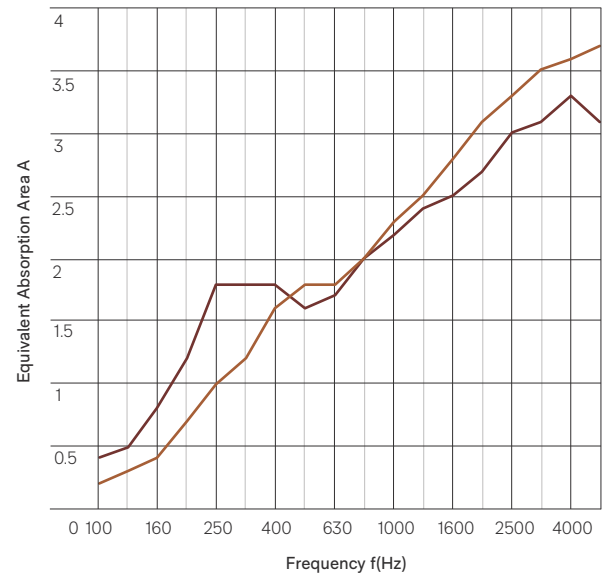

## Product specifications

Product name	Lattice™ Torus
Composition	100% polyester fibre (PET)
Assembled size	1450 mm x 1450 mm x 293 mm
Tolerance	(+/- 0.5 mm) (+/- 0.5 mm) (+/- 0.5 mm)
Thickness	12 mm
Tolerance	(+/- 6%)

## Installation

Install as per Autex Acoustics recommendations. Install instructions are included in each pack or available on the website.



## Acoustic performance

Lattice Torus is specifically designed to reduce and control reverberated noise and echo in building interiors.


Frequency (Hz)	125	250	500	1000	2000	4000	Metric sabin per unit
<b>Lattice Torus</b> (12 mm direct fix)	0.80	1.70	1.60	1.90	2.80	2.30	1.85
<b>Lattice Torus</b> (12 mm suspended 200 mm)	0.30	0.80	1.30	1.80	3.10	2.40	1.60

All results are reported in metric sabin - per unit. Equivalent sound absorption area according to ISO 354 measurement of sound absorption in a reverberation room. Average absorption (sabins per unit) calculated at one-third octave bands centred on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

Sound Absorption Coefficients according to ISO 354.  
University of Auckland Testing Service

Lattice Torus 12 mm direct fix - test no: T1420-2

Lattice Torus 12 mm suspended 200 mm - test no: T1420-3

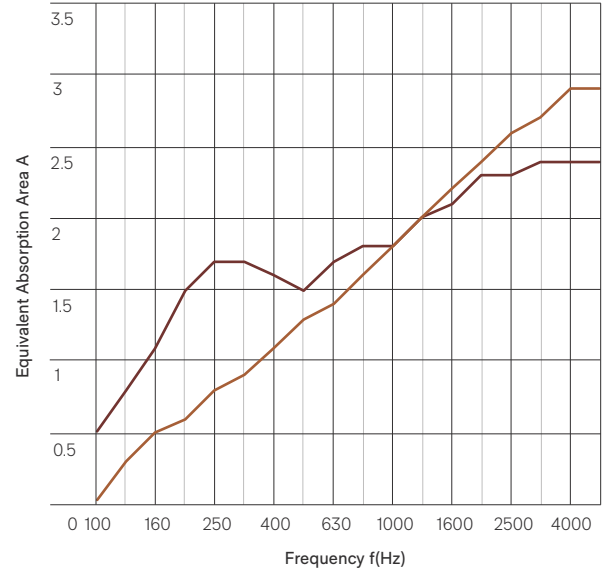

## Product specifications

<b>Product name</b>	Lattice™ Trapezium
<b>Composition</b>	100% polyester fibre (PET)
<b>Assembled size</b>	1180 mm x 2380 mm x 290 mm
<b>Tolerance</b>	(+/- 0.5 mm) (+/- 0.5 mm) (+/- 0.5 mm)
<b>Thickness</b>	12 mm
<b>Tolerance</b>	(+/- 6%)

### Installation

Install as per Autex Acoustics recommendations. Install instructions are included in each pack or available on the website.

## Acoustic performance

Lattice Trapezium is specifically designed to reduce and control reverberated noise and echo in building interiors.


Frequency (Hz)	125	250	500	1000	2000	4000	Metric sabin per unit
<b>Lattice Trapezium</b> (12 mm direct fix)	2.20	4.0	3.40	4.0	4.40	4.60	3.90
<b>Lattice Trapezium</b> (12 mm suspended 200 mm)	1.50	2.50	3.20	4.10	5.0	5.40	3.70

All results are reported in metric sabin - per unit. Equivalent sound absorption area according to ISO 354 measurement of sound absorption in a reverberation room. Average absorption (sabins per unit) calculated at one-third octave bands centred on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

Sound Absorption Coefficients according to ISO 354.  
University of Auckland Testing Service

Lattice Trapezium 12 mm direct fix - test no: T1326-16

Lattice Trapezium 12 mm suspended 200 mm - test no: T1326-14

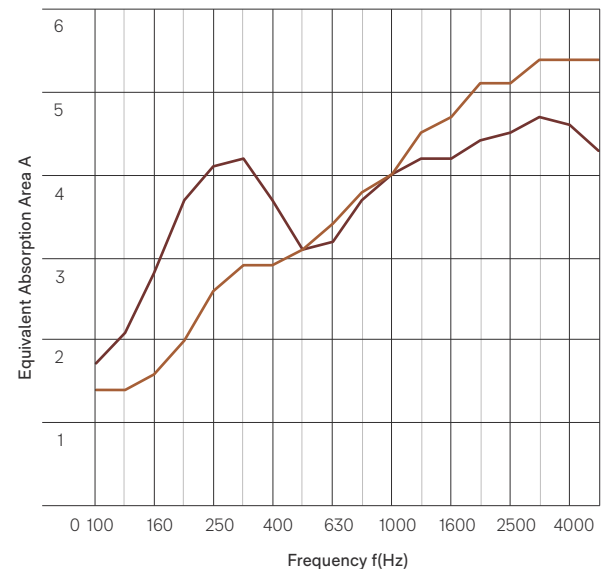



## Product specifications

### Fire ratings

Lattice is made from Cube™ as the base material. Cube (12 mm) has been evaluated using the following test methods:

#### ISO 9705: 1993

Classification: Group 1-S  
Smoke production rate:  
<5.0m2/s  
As required by NZBC C/VM2

#### AS ISO 9705 - 2003

Classification: Group 1  
(SMOGRarc): <100m2/s2  
Assessed using methodology AS ISO 9705 - 2003 in accordance with AS 5637:2015, as required by BCA Specification C110-4  
FI 4974  
FAR 4055

#### BS EN 13501-1:2018

Ceiling applications  
Classification: B-s2,d0  
(Cube™ 12 mm)  
Tested using BS EN ISO 11925-2:2020 and BS EN 13823:2020 and classified in accordance with BS EN 13501-1:2018, as required by BS EN 13964:2014.  
EUI-20-000268-B

### ASTM E-84-15a

Class A, FS:0 - SD:45  
RJ4479-2

### Water vapour sorption

ASTM C1104 / C1104M-13a  
Test conditions: 49°C, 95%RH  
Water vapour absorbed and adsorped after 4 days:  
0.4% by weight

### Microbial resistance

ASTM G21-15  
Growth rating: 0 (No growth)  
Lattice does not promote the growth of moulds and mildew.

### Colour fastness to light

Lattice is suitable for indoor use only. Light fastness is dependent on use and exposure. Lattice has been evaluated to the following standard:  
ISO 105-B02:2014  
Rating: 6 (Highest = 7)

### Colour fastness to rubbing

ISO 105-X12:2016  
Dry rating: 4-5 (Highest = 5)  
Wet rating: 4-5 (Highest = 5)

### Pattern repeat

Non-woven. No pattern repeat but product has directional grain. Product may vary from samples and batch to batch due to fibre blending and lay-up, which is an inherent feature of this product.

### Fabric care

Blot spills from fabric quickly. Wipe with a damp cloth. Avoid rubbing and excessive amounts of water as this will affect the finish. Use carpet or upholstery shampoo as directed. Blot with a clean dry cloth after each application of solution.

Custom printed Lattice requires the services of a specialist cleaning company. Refer to the Lattice Care and Maintenance Guide for more information.

### Service

For further information about Lattice, Cube or any other Autex Acoustics product, please contact your account manager or visit our website.

## Light reflectance values by colour

Lattice is suitable for indoor use only. LRVs were measured in accordance with BS 8493:2008+A1:2010

Pavilion	80	Galaxy	15
Opera	49	Lotus	14
Savoye	46	Ironbank	13
Senado	45	Cavalier	12
Rosada	44	Muralla	9
Acros	40	Gherkin	8
Falling Water	34	Empire	5
Parthenon	33	Sargazo	4
Beehive	33	Pinnacle	3
Bosco	29	Tree House	3
Flatiron	24	Petronas	2
Zenith	23		

